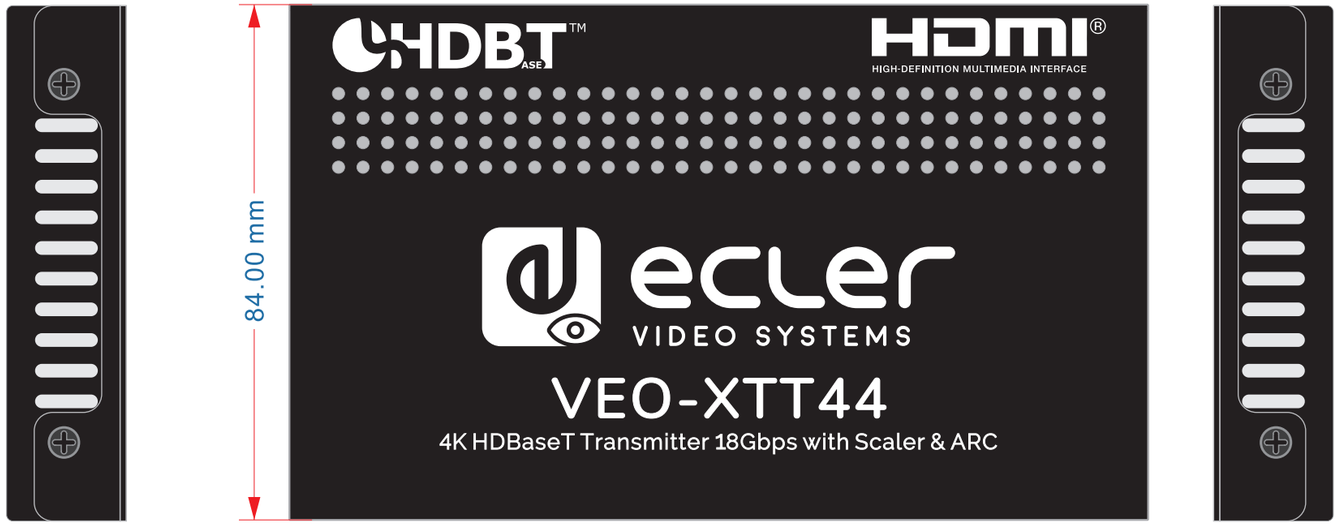
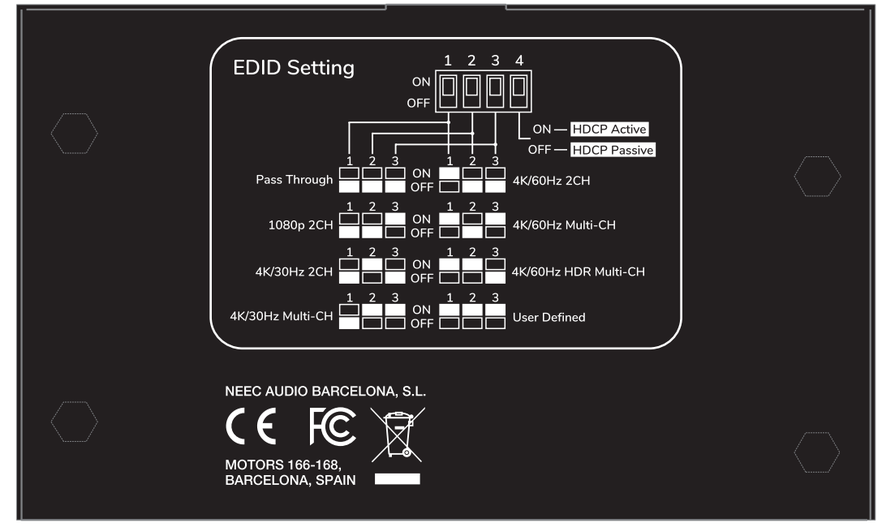
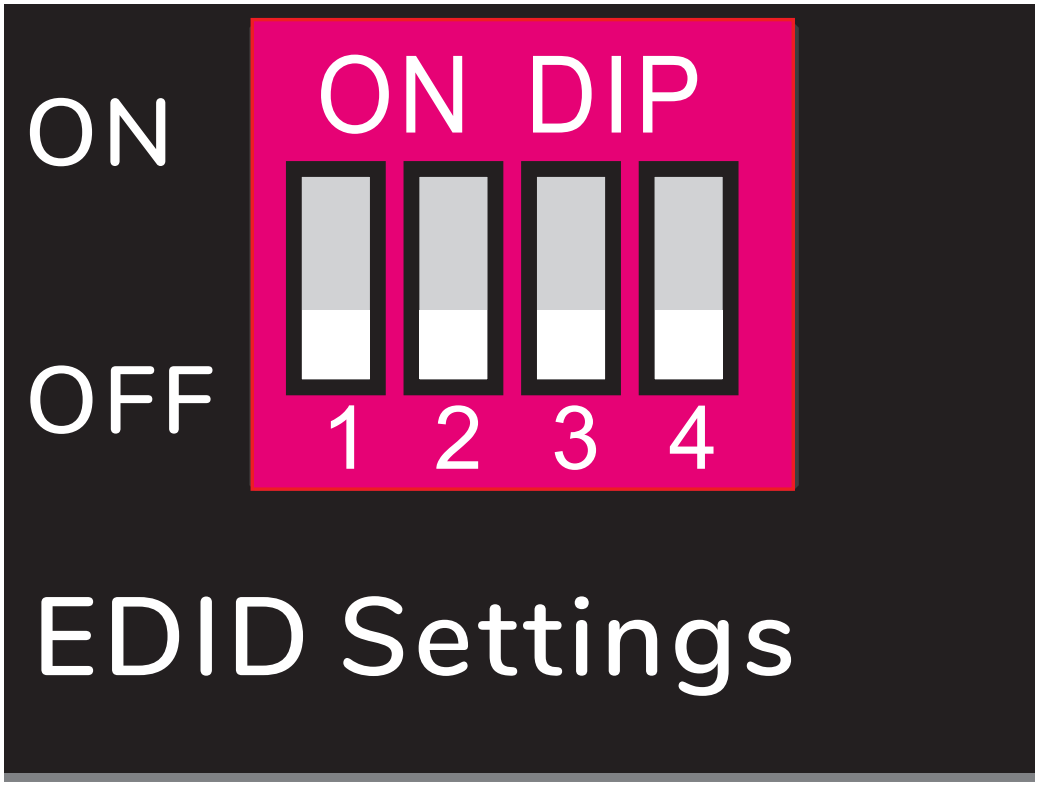

140.00 mm
19.50 mm
HDMI In
ARC
Audio Out
IR In
IR Out
Tx ⊥ Rx
RS-232
HDBT Out
HDCP
LINK
DC 24V


84.00 mm
HDBT™
HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE
ecler
VIDEO SYSTEMS
VEO-XTT44
4K HDBaseT Transmitter 18Gbps with Scaler & ARC


EDID Setting
1 2 3 4
ON
OFF
ON — HDCP Active
OFF — HDCP Passive
Pass Through
4K/60Hz 2CH
1080p 2CH
4K/60Hz Multi-CH
4K/30Hz 2CH
4K/60Hz HDR Multi-CH
4K/30Hz Multi-CH
User Defined
NEEC AUDIO BARCELONA, S.L.
MOTORS 166-168,
BARCELONA, SPAIN


ON
Test
Pattern
1080P -> 4K
ON DIP
OFF
1 2 3 4
EDID Settings
FW

VEO-XTT44 DIPスイッチ表示（拡大）



主図の番号・位置関係は変更していません。設定方法は共通マニュアルを参照してください。